




INNER PANEL CORROSION PROTECTION

STANDARD OPERATING PROCEDURE

1

THE 360° WAND

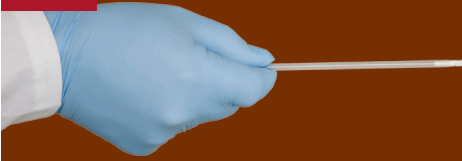

Rust Preventer is easily applied with a 360° spray pattern when using the **Premium Undercoat Gun & Spray Wand** or the **Aero Wand**.

⚠ Do not spray without tip being inserted into inner panel access point.

2A

PREP & APPLY AEROSOL



Clean surface with **SEM Solve** or **XXX Universal Surface Cleaner** where applicable. Remove cap from **Rust Preventer**, attach straw or **Rust Preventer Aero Wand**. Apply 1 – 2 coats.

ⓘ Change angle and depth of the tip inside panel to ensure coverage.

2B

PREP & APPLY QUART



Clean surface with **SEM Solve** or **XXX Universal Surface Cleaner** where applicable. Shake bottle of **Rust Preventer** for 1 minute. Spray 1 – 2 coats at 35 – 45 psi.

ⓘ Change angle and depth of the tip inside panel to ensure coverage.

3

CLEAN WANDS



Clean **Aero Wand** by attaching the tip and wand to **XXX Gun Cleaner**.

Clean **Premium Undercoat Gun & Wand** with **XXX Gun Cleaner** and **XXX Universal Gun Cleaner**.



WATCH & LEARN



TRUE 360° SPRAY PATTERN & 100% COVERAGE



WATCH THE VIDEO AT:
semproducts.com/sop-inner-panel-corrosion-protection

PRODUCT LIST



PREP

Part	Product	Size
38371	SEM Solve	Gallon
38373	SEM Solve	20 oz. Aerosol
38374	SEM Solve	Square Quart
77771	XXX Universal Surface Cleaner	Gallon
77774	XXX Universal Surface Cleaner	Quart



APPLICATIONS

Part	Product	Size
39573	Rust Preventer	24 oz. Aerosol
39574	Rust Preventer	Quart



EQUIPMENT

Part	Product
71109	Premium Undercoat Gun
71110	Premium Undercoat Gun and Spray Wand
71111	Spray Wand
71120	Aero Wand



CLEAN-UP

Part	Product	Size
77743	XXX Gun Cleaner	20 oz. Aerosol
77763	XXX Universal Gun Cleaner	20 oz. Aerosol

SEM Products, Inc.
Rock Hill, SC 29730
Tech Support: 1-800-831-1122
Customer Care: 1-866-327-7829
semproducts.com

